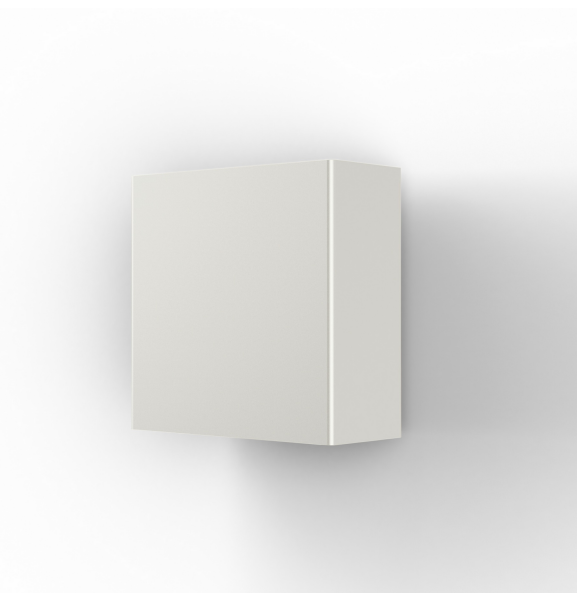


*Technical data*

|                               |                    |
|-------------------------------|--------------------|
| Rated voltage                 | 230V AC            |
| Input voltage range           | 100 - 240 V AC     |
| Class                         | 2                  |
| IP                            | 65                 |
| IK                            | -                  |
| Diffuser                      | Clear PMMA         |
| Bulb cover                    | No                 |
| Source                        | Built-in LED       |
| Color temperature real output | 2800°K warm white  |
| Energy class                  | F (Source LED)     |
| IRC                           | 75                 |
| SDCM                          | -                  |
| Dimmable                      | No                 |
| Ta                            | -                  |
| Led lifetime                  | > 70000h (L90/B50) |
| Ambient temperature range     | -10 ~50°C          |
| UGR                           | -                  |
| ULR                           | -                  |
| Photobiological Risk group    | No                 |
| Fixing kit                    | Yes                |
| With sensor                   | No                 |
| With IP55 socket              | No                 |

[Download the installation manual](#)

### *Materials and finishes*

|          |                             |
|----------|-----------------------------|
| Material | aluminium                   |
| Colour   | Pure white - 101 - RAL 9010 |

### *Logistic data*

|                      |                  |
|----------------------|------------------|
| Product dimensions   | H.125 L.125 P.57 |
| Net weight           | 0.930 Kg         |
| Gross weight         | 1.009 Kg         |
| Package dimensions 1 | H.130 L.130 P.80 |

### *Certifications and warranties*

|                |                         |
|----------------|-------------------------|
| CE             | Yes                     |
| UL             | No                      |
| EAC            | Yes                     |
| RoHS           | Yes                     |
| ENEC           | No                      |
| Anti-corrosion | 25 years (on Aluminium) |
| Technical      | 5 years                 |
| Electronics    | 5 years                 |