

# Tetra

catalogue 2024 p. 48

ref. 162133000


EAN. 3663660253307

Model 4

## Technical data

Rated voltage	230V AC
Input voltage range	100 - 240 V AC
Driver output	350mA
Class	1
IP	65
IK	10
Diffuser	Clear polycarbonate
Bulb cover	No
Source	Built-in LED
Color temperature real output	2700°K warm white ASYM
Real light output	879 lm
Total consumption	12 W
Energy class	-
Luminous efficacy	73,3
IRC	>80
SDCM	5
Dimmable	No
Ta	-
Led lifetime	72000 h (L80/B10)
Ambient temperature range	-10 ~50°C
UGR	-
ULR	1.0%
Photobiological Risk group	RG0
Fixing kit	Yes
With sensor	No
With IP55 socket	Yes

[Download the installation manual](#)

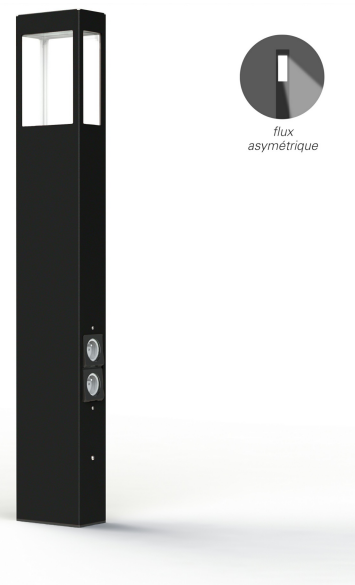

# Tetra

catalogue 2024 p. 48

ref. 162133000

EAN. 3663660253307

Model 4



## Materials and finishes

Material	aluminium
Colour	Jet black - 000

## Logistic data

Product dimensions	H.1100 L.170 P.100
Net weight	6.580 Kg
Gross weight	7.500 Kg
Package dimensions 1	H.1140 L.200 P.130

## Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	3 years