


Technical data

Rated voltage	230V AC
Input voltage range	100 - 240 V AC
Driver output	350mA
Class	1
IP	67
IK	10
Diffuser	-
Bulb cover	No
Source	Built-in LED
Color temperature real output	2700°K warm white
Real light output	1996 lm
Total consumption	16 W
Standby power	-
Energy class	C (Source LED)
Luminous efficacy	125
IRC	>80
SDCM	4
Optic	-
Dimmable	No
Ta	-
Led lifetime	50000 h (L90/B50)
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
Photobiological Risk group	RG2
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)

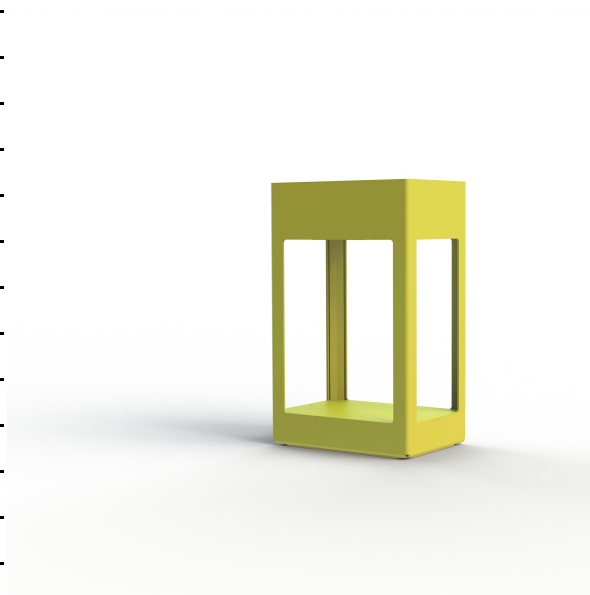

Materials and finishes

Material	aluminium
Colour	Sulfur yellow - 068 - RAL 1016

Logistic data

Product dimensions	H.411 L.250 P.178
Net weight	3.730 Kg
Gross weight	4.440 Kg
Package dimensions 1	H.470 L.350 P.200

Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years