


Technical data

Rated voltage	230V AC
Input voltage range	100 - 240 V AC
Class	2
IP	65
IK	10
Diffuser	Polycarbonate white
Bulb cover	-
Source	Built-in LED
Color temperature real output	4300°K neutral white
Real light output	307 lm
Total consupction	17 W
Energy class	F (Source LED)
Luminous efficacy	18
IRC	>80
SDCM	-
Optic	-
Dimmable	No
Ta	-
Led lifetime	-
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
Photobiological Risk group	No
Fixing kit	Yes
With sensor	No
With IP55 socket	No

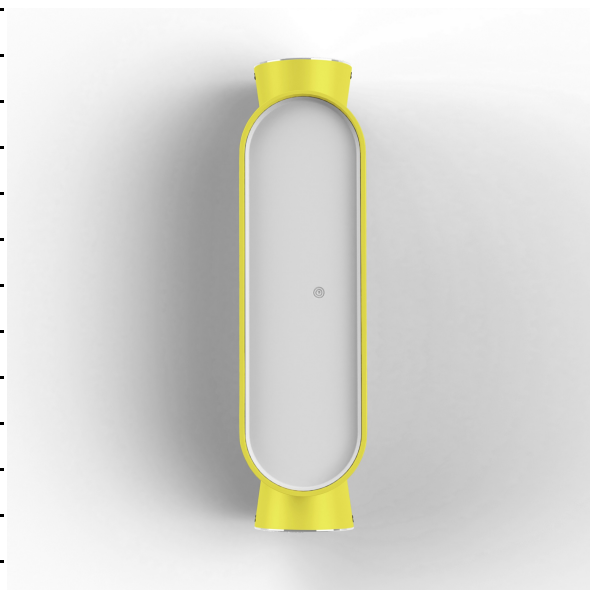

[Download the installation manual](#)

Materials and finishes

Material	aluminium
Colour	Sulfur yellow - 068 - RAL 1016

Logistic data

Product dimensions	H.377 L.99 P.110
Net weight	1.730 Kg
Gross weight	1.890 Kg
Package dimensions 1	H.400 L.170 P.100

Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years