

Louvre

catalogue 2024 p. 218

ref. 133120105


EAN. 3663660290012

Model 10

Technical data

| | |
|-------------------------------|-------------------------|
| Rated voltage | 230V AC |
| Input voltage range | 100 - 240 V AC |
| Driver output | 700mA |
| Alimentation output | - |
| Class | 1 |
| IP | 44 |
| IK | - |
| Diffuser | one-piece clear glass |
| Bulb cover | - |
| Source | Built-in LED |
| Color temperature real output | 2700°K warm white |
| Real light output | 2316 lm |
| Total consumption | 3x13 W |
| Energy class | D (Source LED) |
| Luminous efficacy | 59 |
| IRC | 83 |
| SDCM | - |
| Optic | - |
| Dimmable | No |
| Ta | - |
| Led lifetime | 50000 h (L90/B50) |
| Ambient temperature range | -10 ~50°C |
| UGR | - |
| ULR | - |
| Photobiological Risk group | No |
| THDI | - |
| Fixing kit | Anchor bolts on request |
| With sensor | No |
| With IP55 socket | No |

[Download the installation manual](#)

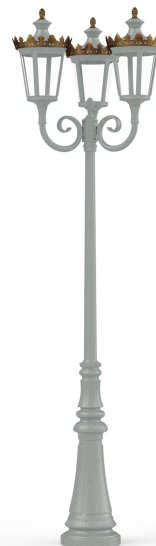

Louvre

catalogue 2024 p. 218

ref. 133120105

EAN. 3663660290012

Model 10



Materials and finishes

| | |
|----------|----------------------------|
| Material | aluminium |
| Colour | Silk grey - 105 - RAL 7044 |

Logistic data

| | |
|----------------------|--------------------|
| Product dimensions | H.2659 L.764 P.764 |
| Net weight | 0.000 Kg |
| Gross weight | 0.000 Kg |
| Package dimensions 1 | H.1210 L.310 P.310 |
| Package dimensions 1 | H.540 L.480 P.370 |
| Package dimensions 3 | H.540 L.480 P.370 |
| Package dimensions 4 | H.540 L.480 P.370 |
| Package dimensions 5 | H.370 L.370 P.230 |

Certifications and warranties

| | |
|----------------|-------------------------|
| CE | Yes |
| UL | No |
| EAC | Yes |
| RoHS | Yes |
| ENEC | No |
| Anti-corrosion | 25 years (on Aluminium) |
| Technical | 5 years |
| Electronics | 5 years |