


Technical data

Rated voltage	230V AC
Input voltage range	220 - 240 V AC
Driver output	-
Alimentation output	-
Class	1
IP	65
IK	-
Diffuser	Satin-finish PMMA
Bulb cover	No
Source	E27
Color temperature real output	-
Real light output	- lm
Standby power	-
Energy class	Classe de la lampe (non fournie)
IRC	-
SDCM	-
Optic	-
Dimmable	-
Ta	-
Led lifetime	-
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
Photobiological Risk group	-
THDI	-
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)

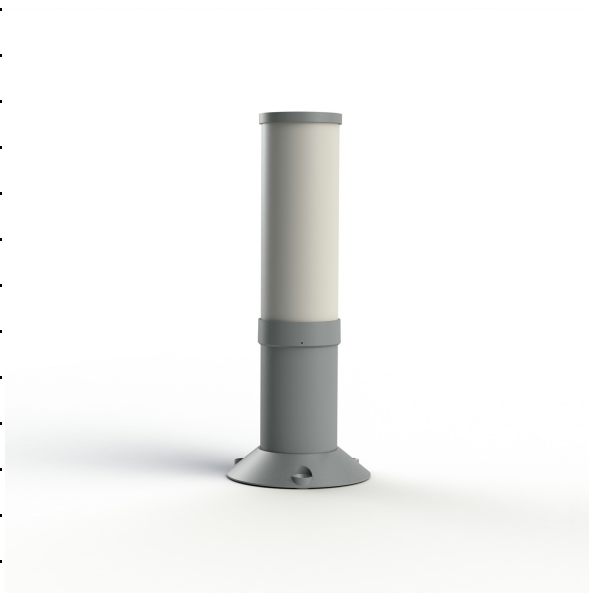

Materials and finishes

Material	aluminium
Colour	Silk grey - 105 - RAL 7044

Logistic data

Product dimensions	H.374 L.150 P.150
Net weight	1.120 Kg
Gross weight	2.080 Kg
Package dimensions 1	H.420 L.280 P.300

Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	-