

# Technical data sheet

## PYROLINE® Con S PLC fire protection duct EI30 - EI60

Item number: 7217860



Fire protection duct made of water and frost-resistant fibreglass lightweight concrete of material class A1 according to EN 13501-1 for fireproof routing of cables in escape and rescue routes. EI30 - EI60 classification as installation duct according to EN 13501-2 on the basis of tests in accordance with EN 1366-5. When there is an internal fire load (cable fire), the duct prevents the spread of fire from one fire section to another.

Mounting of the duct on wall brackets or as ceiling mounting with suspended supports and brackets or on a U transverse profile suspended with threaded rods. Mounted connectors ensure quick mounting in situ, whilst loosely placed covers ensure quick inspection and reassignment.

Including connection screws and sealing strips.  
Including connection screws and sealing strips.



Fibreglass lightweight concrete

### Master data

|                     |                                 |
|---------------------|---------------------------------|
| Item number         | 7217860                         |
| Description 1       | Fire protection duct EI60       |
| Description 2       | Suspended mounting              |
| Manufacturer        | OBO                             |
| Dimension           | 1000x100x80                     |
| Colour              | Grey                            |
| Material            | Fibreglass lightweight concrete |
| Smallest sales unit | 1                               |
| Unit of quantity    | Metre                           |
| Weight              | 1370 kg                         |
| Weight unit         | kg/100 m                        |


# Technical data sheet

## PYROLINE® Con S PLC fire protection duct EI30 - EI60

Item number: 7217860



### Dimensions

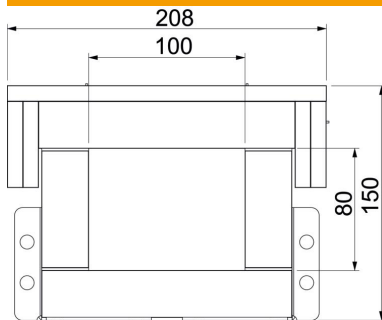

|             |          |
|-------------|----------|
| Length      | 1,000 mm |
| Dimension B | 208 mm   |
| Dimension b | 100 mm   |
| Dimension h | 80 mm    |
| Dimension H | 150 mm   |

### Technical data

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Number of flammable sides             | 4                                |
| Cover fastening                       | Loose                            |
| Classification EI - installation duct | 60                               |
| With perforation                      | no                               |
| Jacketing                             | Without                          |
| Material of the insulation            | Glass-fibre lightweight concrete |