# Technical data sheet

## Pressure ISO clip 3051, single, light grey

## Item number: 2101033




With adhesive base, slot and for screwing to M6 thread.
Use the Impu-Fix ribbon conductor quick adhesive, type 509, to stick the polystyrene clips to masonry and concrete.

PS Polystyrene

### Master data


| | |
|---|---|
| Item number | 2101033 |
| Type | 3051 LGR |
| Description 1 | Pressure ISO clip |
| Manufacturer | OBO |
| Dimension | 14-24mm |
| Colour | Light grey; RAL 7035 |
| Material | Polystyrene |
| Smallest sales unit | 50 |
| Unit of quantity | Piece |
| Weight | 0.72 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0278 kg COe / 1 Piece |


# Technical data sheet

## Pressure ISO clip 3051, single, light grey

## Item number: 2101033

### Dimensions

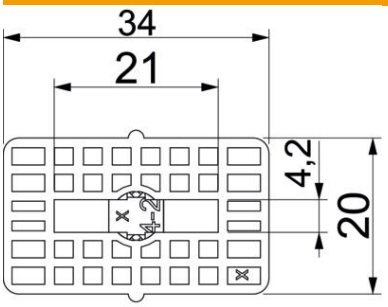

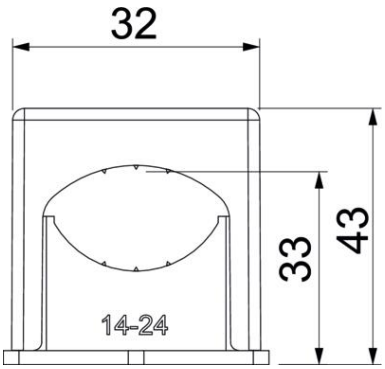
| | |
|---|---|
| Dimension a | 34 mm |
| Dimension a1 (mm) | 21 mm |
| Dimension b | 20 mm |
| Dimension b1 | 4.2 mm |
| Dimension c | 32 mm |
| Dimension d | 33 mm |
| Dimension e | 43 mm |

### Technical data

| | |
|---|---|
| Expandable | no |
| Number of cables/pipes | 1 |
| Fastening type | Screw hole |
| Halogen-free | yes |
| Snap system | yes |
| Impact-resistant | yes |
| Clamping range D, max. | 24 mm |
| Clamping range D, min. | 14 mm |