# Technical data sheet

## starQuick clip SWS

## Item number: 2146925




Highly stable clip to accept plastic and metal electrical and sanitary pipes, as well as the Quick Pipe electrical installation pipe. Universal fastening options on walls, ceilings and steel structures, both indoors and outdoors. Flexible clamping range of several millimetres. Toolless pipe mounting. Can be arranged to up to Ø 28 mm, also with OBO Quick clip or starQuick clip. For high load values, can be combined with double bracket. Can be mounted on profile rails for variable spacings and numbers of clips.

PA Polyamide

### Master data


| | |
|---|---|
| Item number | 2146925 |
| Description 1 | starQuick clip |
| Manufacturer | OBO |
| Dimension | 16-20mm |
| Colour | Signal white; RAL 9003 |
| Material | Polyamide |
| Smallest sales unit | 1 |
| Unit of quantity | Packaging unit |
| Weight | 12.82 kg |
| Weight unit | kg/100 PUs |

# Technical data sheet

## starQuick clip SWS

## Item number: 2146925

### Dimensions

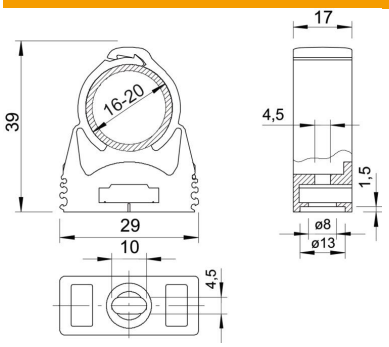


| | |
|---|---|
| Dimension A | 29 mm |
| Dimension B | 17 mm |
| Dimension H | 39 mm |

### Technical data

| | |
|---|---|
| Expandable | yes |
| Number of cables/pipes | 1 |
| Pull-out value | 700 N |
| Fastening type | Screw hole |
| Breaking load | 700 kN |
| Flame-resistant | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Closed | yes |
| Halogen-free | yes |
| With inlay | no |
| Nominal size | 17-19 |
| Snap system | yes |
| Quick clip installation | Duchgangsloch_mit_starQuick-Mutter_M6_oder_M8 |
| Clamping range D, max. | 20 mm |
| Clamping range D, min. | 16 mm |
| UV-resistant | yes |