

# Technical data sheet

External corner hood, for device installation trunking Rapid 45-2 type GK-53100  
Item number: 6113050



External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.



Polycarbonate/Acrylnitrile-butadiene-styrene

## Master data

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Item number                       | 6113050                                      |
| Description 1                     | External corner                              |
| Description 2                     | variable                                     |
| Manufacturer                      | OBO                                          |
| Dimension                         | 110x88x88                                    |
| Colour                            | Pure white; RAL 9010                         |
| Material                          | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit               | 1                                            |
| Unit of quantity                  | Piece                                        |
| Weight                            | 7.153 kg                                     |
| Weight unit                       | kg/100 pc.                                   |
| CO Footprint (GWP) Cradle-to-Gate | 0,5809 kg COe / 1 Piece                      |

# Technical data sheet


External corner hood, for device installation trunking Rapid  
45-2 type GK-53100  
Item number: 6113050



## Dimensions



|        |        |
|--------|--------|
| Length | 88 mm  |
| Width  | 110 mm |
| Height | 55 mm  |

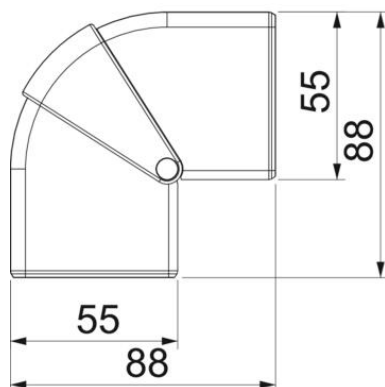

# Technical data sheet

External corner hood, for device installation trunking Rapid  
45-2 type GK-53100  
Item number: 6113050



## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Number of covers                  | 1            |
| Version for                       | Hood fitting |
| for duct width                    | 100 mm       |
| for trunking height               | 53 mm        |
| Halogen-free                      | yes          |
| Cable retaining clip              | no           |
| Duct connector                    | no           |
| Cover mounting type               | Cross-over   |
| Mounting perforation in base      | no           |
| Cover width                       | 0 mm         |
| Cover width 2                     | 0 mm         |
| Cover width 3                     | 0 mm         |
| Protection rating                 | IP40         |
| Protective film                   | no           |
| Protection rating IK code         | IK08         |
| Symmetrical                       | yes          |
| Permitted temperature range, max. | 60 °C        |
| Permitted temperature range, min. | -15 °C       |
| Angle range, max.                 | 110 mm       |
| Angle range, min.                 | 80 mm        |