Technical data sheet

AX 20 cable routing trunking, trunking width 50, with partition

Item number: 6131614



Cable routing trunking Axis Mini for covered cable routing in internal areas.
Trunking base with base perforation for direct mounting on the wall partition to install different voltage levels.
Base and cover as set.

PVC Polyvinylchloride

Master data


Item number	6131614
Description 1	Cable trunking
Description 2	AXIS MINI Set 20x50 TW 9010
Manufacturer	OBO
Colour	Pure white; RAL 9010
Material	Polyvinylchloride
Smallest sales unit	44
Unit of quantity	Metre
Weight	31 kg
Weight unit	kg/100 m
CO Footprint (GWP) Cradle-to-Gate	0,5372 kg COe / 1 Meter

Technical data sheet

AX 20 cable routing trunking, trunking width 50, with partition

Item number: 6131614

Dimensions

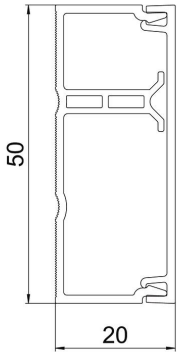

Length	2,000 mm
Width	50 mm
Height	20.1 mm

Technical data

Number of fixed partitions	1
Number of insertable partitions	0
Version, cable trunking cover	Loose
Fastening type	Base perforation
Maintain electrical functions	no
Halogen-free	no
Cable retaining clip	no
Duct connector	no
Delivery on a roll	no
Usable cross-section	690 mm²
Protection rating	IP40
Protective film	no
Protection rating IK code	IK07.
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C
Transparent	no