


# Technical data sheet

Internal corner hood, for device installation trunking Rapid 45-2 type GK-53100  
Item number: 6113070



Internal corner for changing the direction of Rapid 45 device installation trunking.

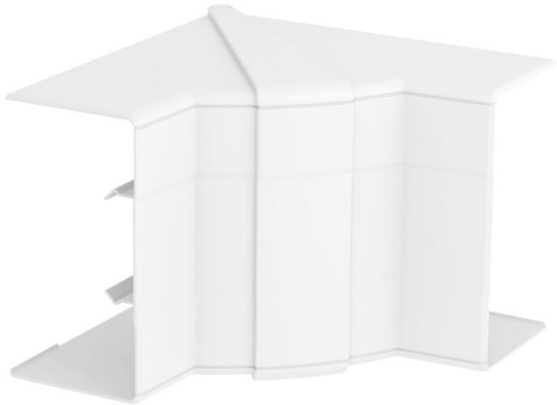

Polycarbonate/Acrylnitrile-butadiene-styrene

## Master data


|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Item number                       | 6113070                                      |
| Description 1                     | Internal corner                              |
| Description 2                     | variable                                     |
| Manufacturer                      | OBO                                          |
| Dimension                         | 110x145x145                                  |
| Colour                            | Pure white; RAL 9010                         |
| Material                          | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit               | 1                                            |
| Unit of quantity                  | Piece                                        |
| Weight                            | 12.856 kg                                    |
| Weight unit                       | kg/100 pc.                                   |
| CO Footprint (GWP) Cradle-to-Gate | 0,8831 kg COe / 1 Piece                      |

# Technical data sheet

Internal corner hood, for device installation trunking Rapid  
45-2 type GK-53100  
Item number: 6113070



## Dimensions

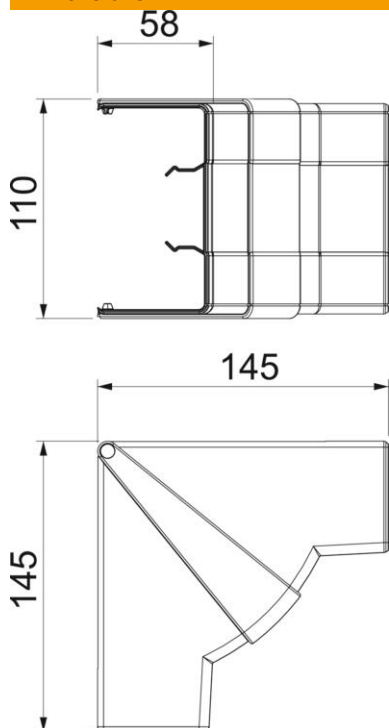

|        |        |
|--------|--------|
| Length | 145 mm |
| Width  | 110 mm |
| Height | 58 mm  |

## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Number of covers                  | 1            |
| Version for                       | Hood fitting |
| Shape                             | Symmetrical  |
| Halogen-free                      | yes          |
| Cable retaining clip              | no           |
| Duct connector                    | no           |
| Cover mounting type               | Cross-over   |
| Mounting perforation in base      | no           |
| Cover width                       | 0 mm         |
| Cover width 2                     | 0 mm         |
| Cover width 3                     | 0 mm         |
| Protection rating                 | IP40         |
| Protective film                   | no           |
| Protection rating IK code         | IK08         |
| Permitted temperature range, max. | 60 °C        |
| Permitted temperature range, min. | -15 °C       |
| Angle range, max.                 | 97 mm        |
| Angle range, min.                 | 83 mm        |