



Installation video





3 PCS







3 PCS




3 PCS

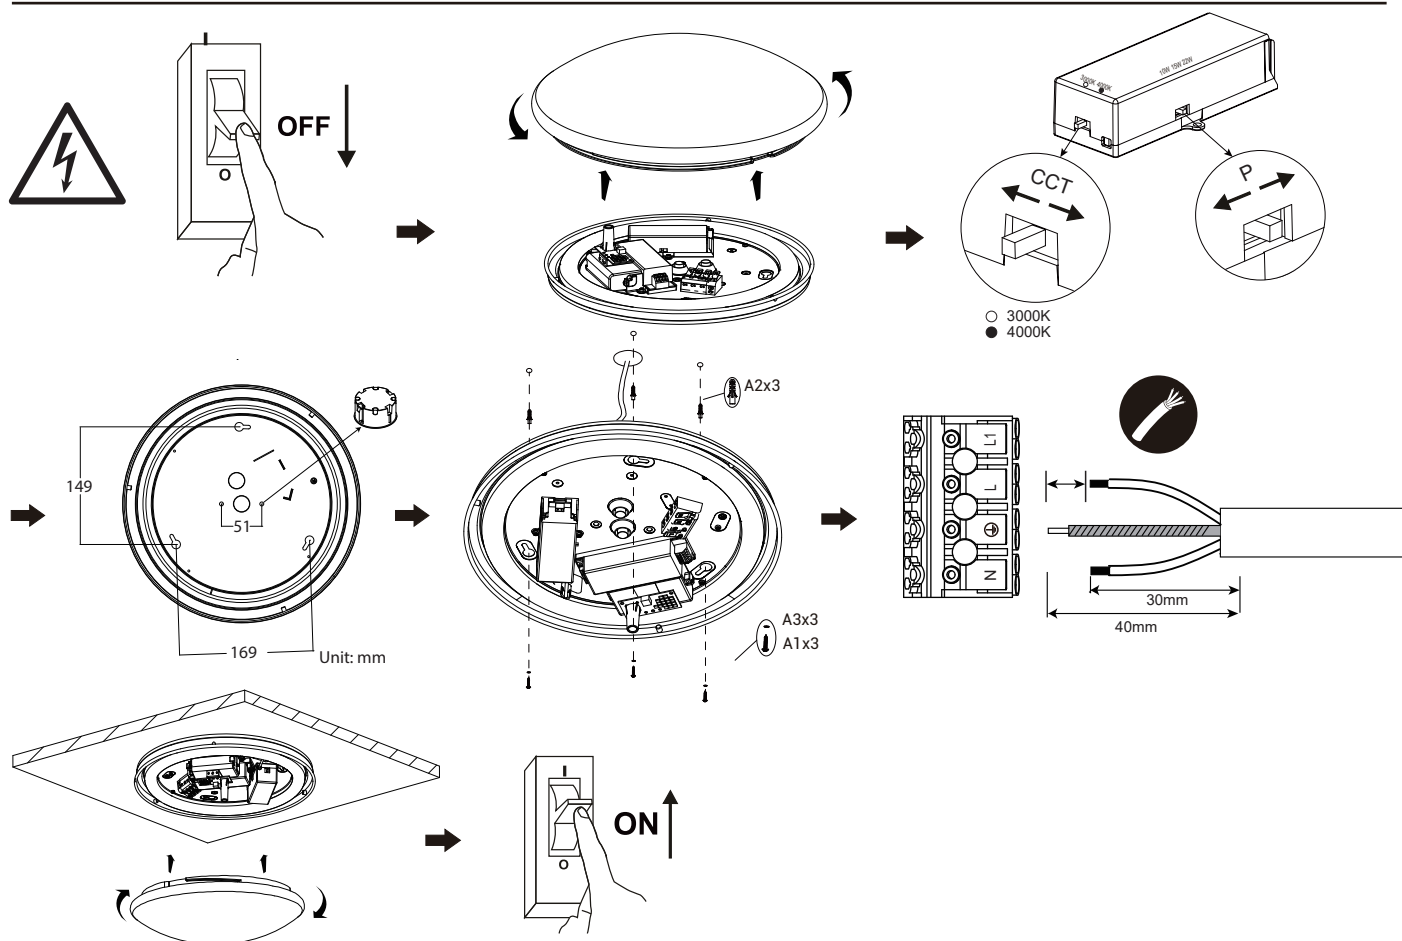

Max. 2A
Max. 400W

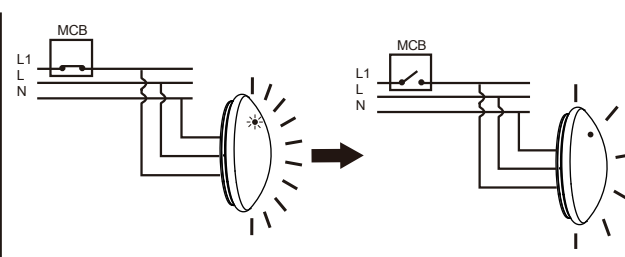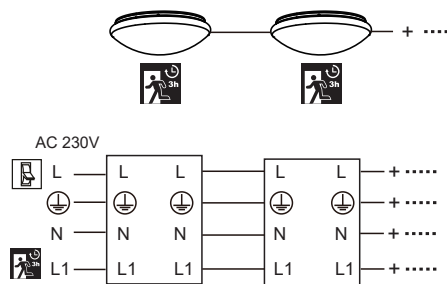

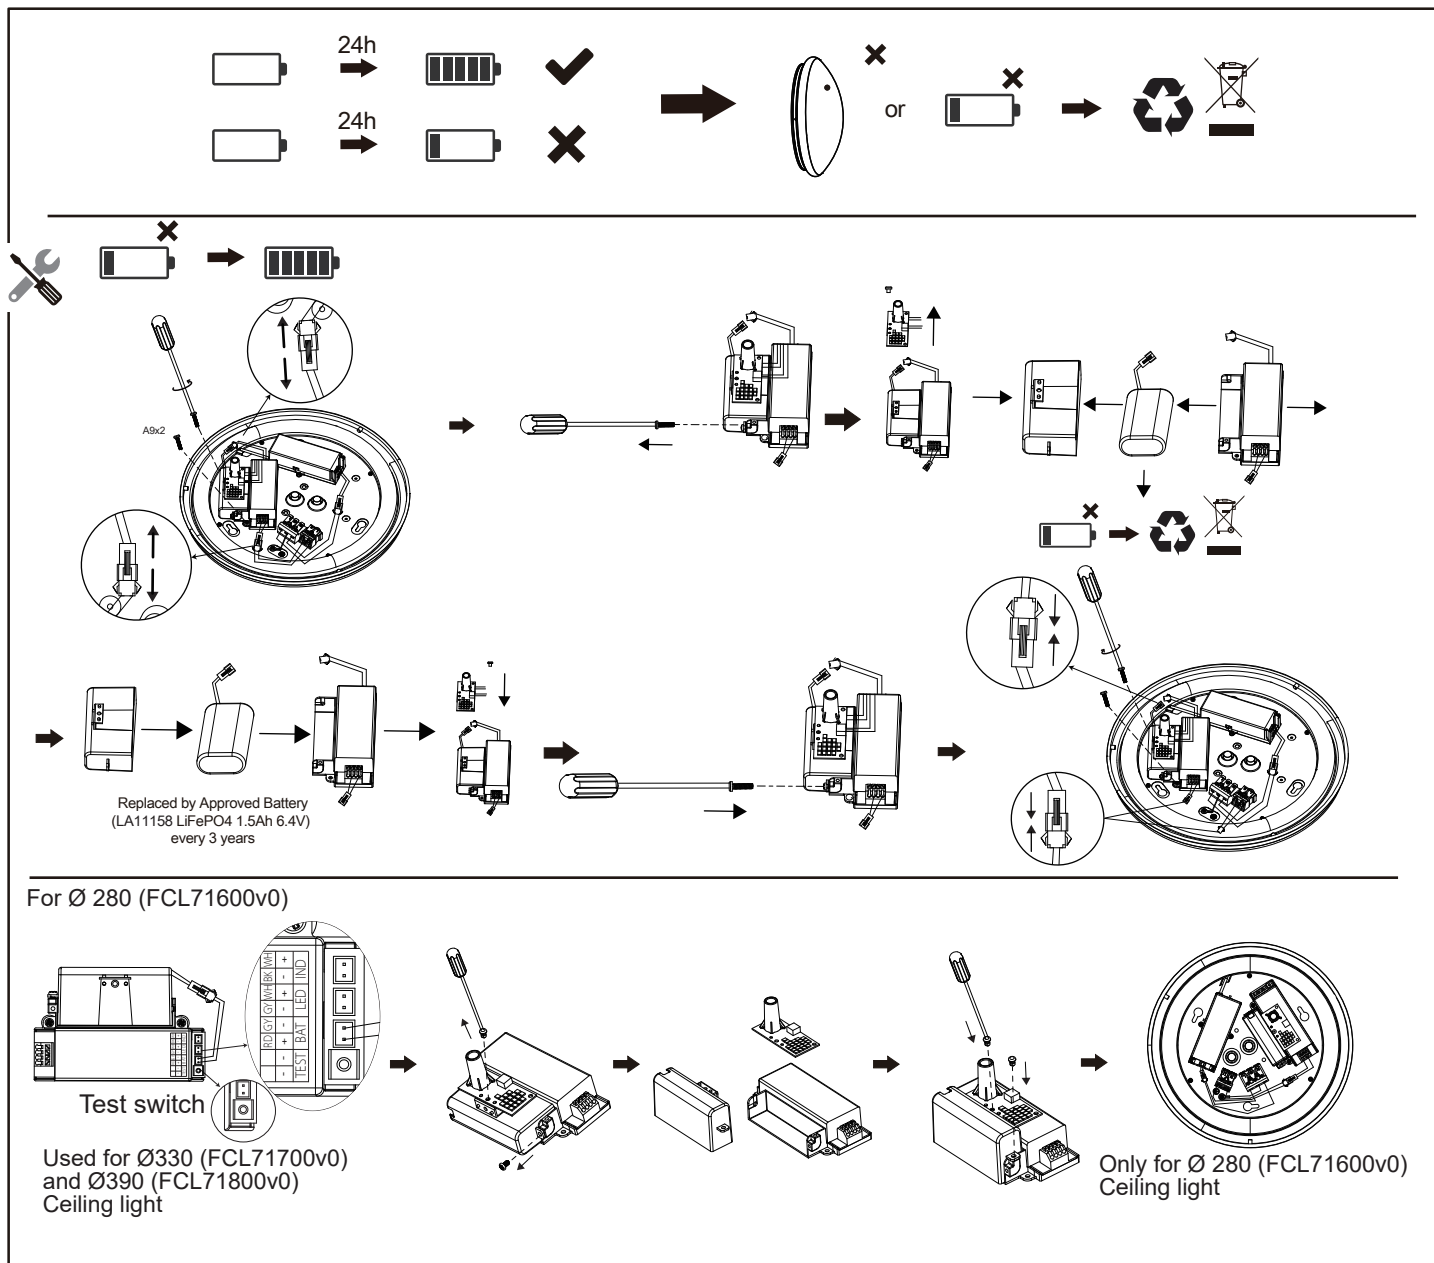

Caution – Risk of Electric Shock! Vorsicht - GEFAHR EINES STROMSCHLAGS! ATENCIÓN - RIESGO DE DESCARGA ELÉCTRICA! Attenzione - RISCHIO DI SCOSSA ELETTRICA!

ATTENTION - RISQUE DE CHOC ÉLECTRIQUE! Voorzichtig - GEVAAR VOOR EEN ELEKTRISCHE SCHOK! POZOR! - Riziko úrazu elektrickým proudem.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Das in dieser Leuchte enthaltene Leuchtmittel darf nur durch den Hersteller, seinen Kundendienst oder entsprechend qualifiziertes Fachpersonal ausgetauscht werden.

La fuente de iluminación de esta luminaria solo debe ser sustituida por el fabricante o su agente de servicio, o en su caso, por personal cualificado.

La sorgente luminosa contenuta in questo apparecchio deve essere sostituita esclusivamente dal produttore, dal suo rappresentante o da una persona similmente qualificata.

La source lumineuse contenue dans ce luminaire ne doit être remplacée que par le fabricant ou son agent de maintenance ou une personne de qualification équivalente.

De lichtbron in deze lamp mag alleen worden vervangen door de fabrikant, zijn serviceagent of een vergelijkbaar gekwalificeerd persoon.

Zdroj světla v tomto svítidle smí být vyměněn pouze elektrikářem, nebo servisním agentem výrobce.

This product contains a light source of energy efficiency class <X>

Este producto contiene una fuente luminosa de la clase de eficiencia energética <X>


Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse <X>

Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica <X>

Ce produit contient une source lumineuse de classe d'efficacité énergétique <X>


Dit product bevat een lichtbron van energie-efficiëntieklasse <X>

Tento výrobek obsahuje světelný zdroj třídy energetické účinnosti <X>

	P	I	λ	Light source energy efficiency class <X>	Ta	
FCL71600v0+LA11149	15W	85mA	>0.7	E	0°C ~ +35°C	Ø280 x H100
FCL71600v0-sc+LA11149	15W	85mA	>0.7	E	0°C ~ +35°C	Ø280 x H100
FCL71700v0-sc+LA11149	19W	110mA	>0.7	F	0°C ~ +35°C	Ø330 x H110
FCL71700v0+LA11149	19W	110mA	>0.7	F	0°C ~ +35°C	Ø330 x H110
FCL71800v0-ds+LA11149	26W/19W/14W	150mA/110mA/85mA	>0.7	E	0°C ~ +35°C	Ø390 x H115
FCL71800v0-ds/sc+LA11149	26W/19W/14W	150mA/110mA/85mA	>0.7	E	0°C ~ +35°C	Ø390 x H115
LA11149	4W	Max.55mA	0.35	N/A	0°C ~ +45°C	N/A

Note: 1. After the main circuit is powered off, the photometric data in the emergency mode reaches 300 lm within 5 s.

2. The battery is replaceable, and the replacement of the battery is needed when they no longer meet their rated duration of operation after the corresponding recharge period.



MEGAMAN®