



Produit, caractéristiques techniques et fonctionnalités

Kit d'installation standard :




Support collier (x2)
Collier (x2)
Jonc de protection de collier (x2)
Vis M6x20 (x2)

Caractéristiques générales :

Support collier polycarbonate RAL7035
Collier inox 304L ou 316L (suivant version)
Jonc de protection EPDM noir

Référence(s) :

- **98777001** Support 70mm inox 304L
 - **98777002** Support 100mm inox 304L
 - **98778001** Support 70mm inox 316L
 - **98778002** Support 100mm inox 316L
- Suffixe **9701** version visserie anti-vandale

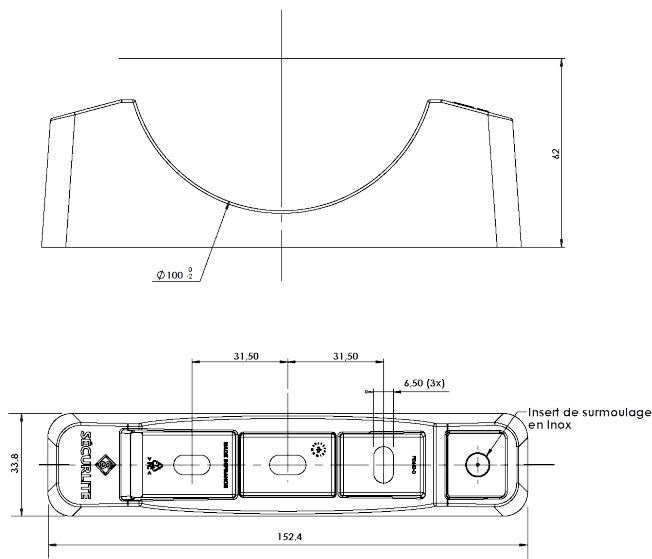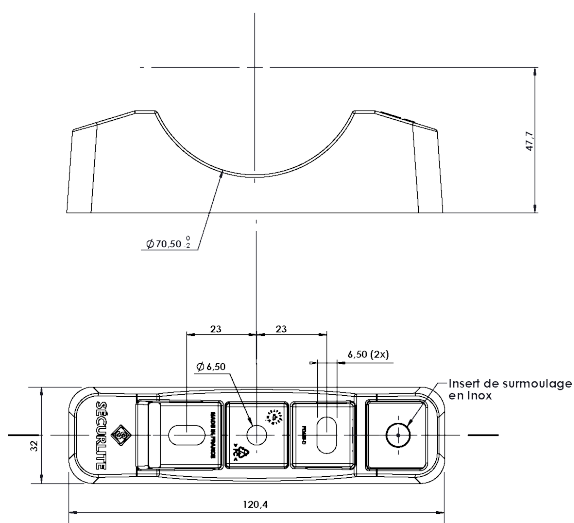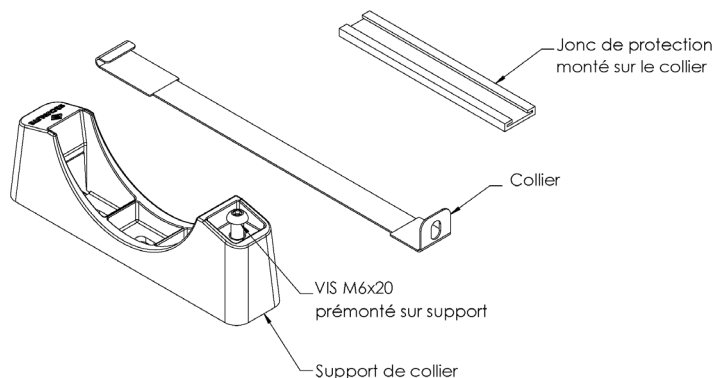

Conditions d'utilisation

- adaptés à une utilisation en intérieur et extérieur
- positions d'installation : se référer à la notice d'installation du luminaire

Montage



Attention, risque de chocs ESD sur les LEDs.




Le montage et l'installation doit être fait par un installateur professionnel en respectant les normes d'installation en vigueur.



Couper l'alimentation avant la pose et le branchement.


Montage




Suivre la notice du luminaire afin de respecter les entraxes de fixation.

Pour la fixation des supports, utiliser des vis de diamètre 6mm à tête plate et des chevilles adaptées au type de paroi pour avoir une résistance optimale à l'arrachement. Les vis et chevilles ne sont pas fournies avec les supports.


Dévisser la vis M6 du support de collier.

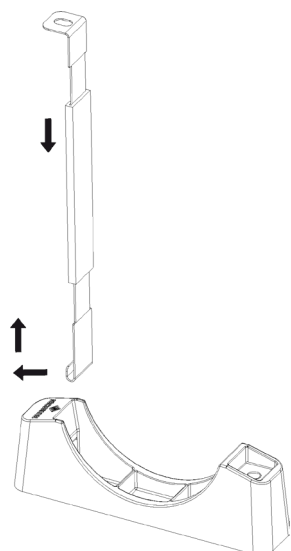

Insérer le collier dans le support.

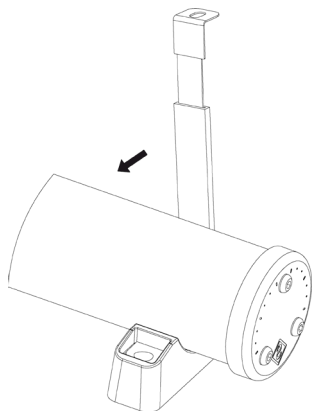

Enrouler le collier sur le tube du luminaire.

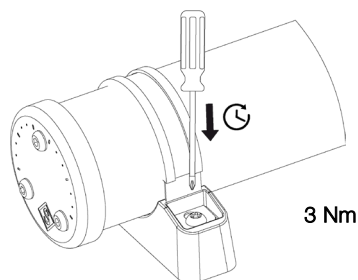

Visser la vis M6 pour bloquer le collier.

Recyclabilité



Les supports de fixation sont des accessoires éco-conçus :

Toutes les pièces plastiques ou métalliques peuvent être démontées et recyclées dans une filière adaptée.



Product, technical characteristics and features

Standard installation kit :




Collar support (x2)
Collar (x2)
Collar protection ring (x2)
M6x20 screws (x2)

General specifications :

Polycarbonate collar support RAL7035
304L or 316L stainless steel collar (depending on version)
Black EPDM protection ring

Reference(s) :

- **98770001** Support 70mm stainless steel 304L
 - **98770002** Support 100mm stainless steel 304L
 - **98778001** Support 70mm stainless steel 316L
 - **98778002** Support 100mm stainless steel 316L
- Suffix **9701** vandal-proof screw version

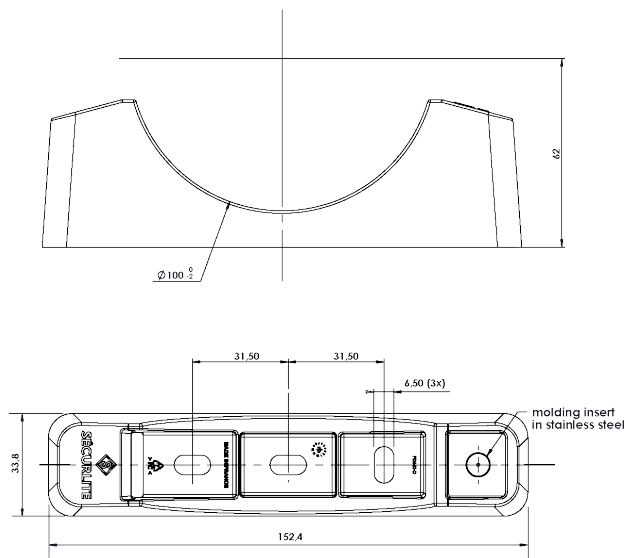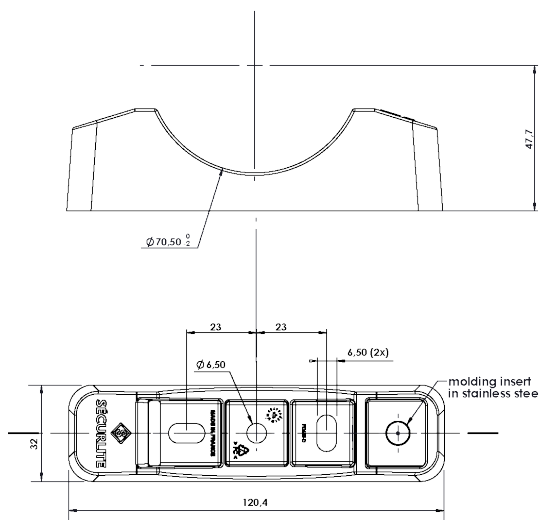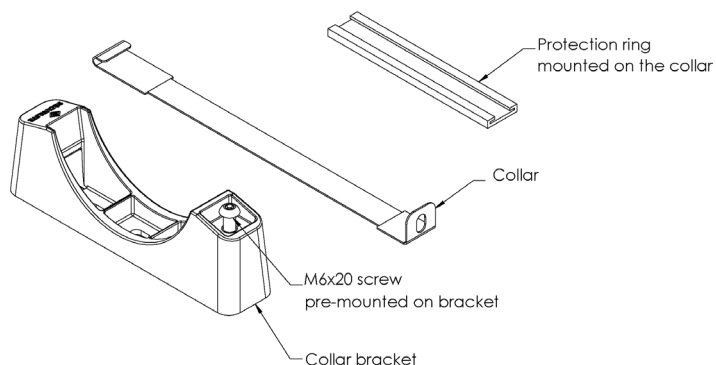

Conditions of use

- suitable for indoor and outdoor use
- installation positions : refer to luminaire installation instructions

Mounting



Warning, versions employing LEDs are at risk from ESD (electrostatic discharges).




Fitting & installation must be carried out by a professional installer in accordance with current installation standards.



Isolate the power before fitting and connecting up.


Mounting




Follow the luminaire's instructions to ensure that mounting centers are respected.

For mounting brackets, use 6mm-diameter flat-head screws and wall plugs adapted to the type of wall, for optimum resistance to tearing. Screws and plugs are not supplied with brackets.


Unscrew the M6 screw from the collar bracket.

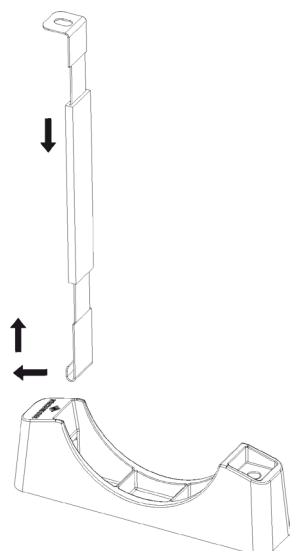

Insert collar into bracket.

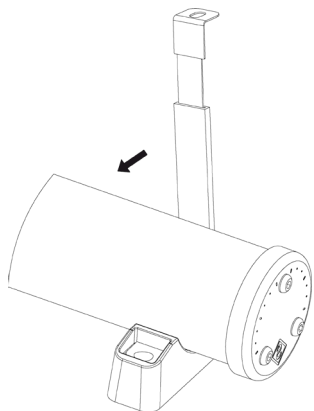

Wrap the collar around the luminaire tube.



Tighten the M6 screw to secure the collar.

Recyclability



The mounting brackets are eco-designed accessories :

- All the plastic or metal components can be dismantled and recycled via appropriate facilities.